
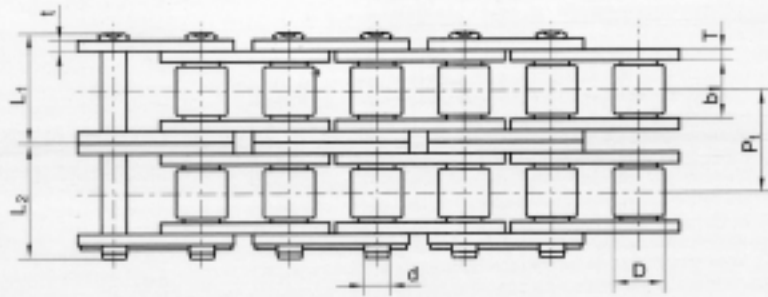


石油钻机链

Oilfield Chains

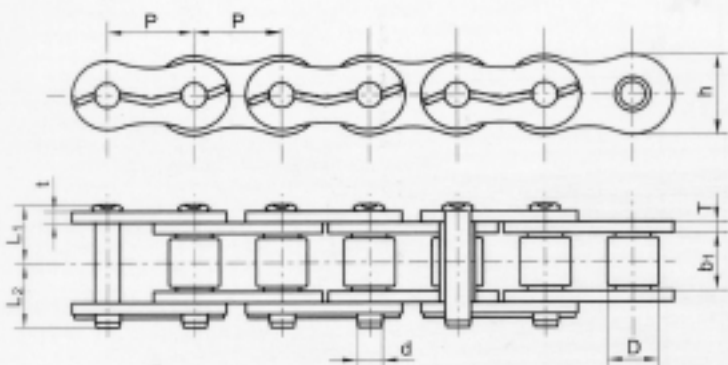

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b ₁ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin			链板 Plate		排距 Transverse pitch Pt mm	最小抗拉 强度 Ultimate tensile strength Q _{min} kN	平均拉 伸强度 Average tensile strength Q ₀ kN	每米净重 Weight per meter q kg/m
				d mm	L ₁ mm	L ₂ mm	h mm	t/T mm				
24S-1	38.1	25.22	22.23	11.1	25.3	29.2	36	4.9	/	125.1	135.1	6.347
24S-2	38.1	25.22	22.23	11.1	48.05	51.95	36	4.9	45.44	250.2	270.2	12.405
24S-3	38.1	25.22	22.23	11.1	70.75	74.65	36	4.9	45.44	375.3	405.3	18.457
24S-4	38.1	25.22	22.23	11.1	93.45	97.35	36	4.9	45.44	500.4	540.4	24.514
24S-5	38.1	25.22	22.23	11.1	116.2	120.1	36	4.9	45.44	625.5	675.5	30.567
24S-6	38.1	25.22	22.23	11.1	138.9	142.8	36	4.9	45.44	750.6	810.6	36.624
24S-8	38.1	25.22	22.23	11.1	184.35	188.25	36	4.9	45.44	1000.8	1080.9	48.738
24S-10	38.1	25.22	22.23	11.1	229.8	233.7	36	4.9	45.44	1251.0	1351.1	60.852
28S-1	44.45	25.22	25.4	12.7	27.4	31.1	42	5.6	/	170.3	183.9	7.996
28S-2	44.45	25.22	25.4	12.7	51.8	55.5	42	5.6	48.87	340.6	367.8	15.67
28S-3	44.45	25.22	25.4	12.7	76.2	79.9	42	5.6	48.87	510.8	551.7	23.344
28S-4	44.45	25.22	25.4	12.7	100.65	104.35	42	5.6	48.87	681.1	735.6	31.025
28S-5	44.45	25.22	25.4	12.7	125.05	128.75	42	5.6	48.87	851.4	919.5	38.699
28S-6	44.45	25.22	25.4	12.7	149.5	153.2	42	5.6	48.87	1021.6	1103.3	46.376
28S-8	44.45	25.22	25.4	12.7	198.35	202.05	42	5.6	48.87	1362.2	1471.2	61.728
28S-10	44.45	25.22	25.4	12.7	247.25	250.95	42	5.6	48.87	1702.7	1838.9	77.084
32S-1	50.8	31.55	28.58	14.27	32.35	36.95	48	6.4	/	222.4	240.2	10.67
32S-2	50.8	31.55	28.58	14.27	61.65	66.25	48	6.4	58.55	444.8	480.4	20.898
32S-3	50.8	31.55	28.58	14.27	90.9	95.5	48	6.4	58.55	667.2	720.6	31.123
32S-4	50.8	31.55	28.58	14.27	120.15	124.75	48	6.4	58.55	889.6	960.8	41.349
32S-5	50.8	31.55	28.58	14.27	149.45	154.05	48	6.4	58.55	1112.0	1201.0	51.577
32S-6	50.8	31.55	28.58	14.27	178.7	183.3	48	6.4	58.55	1334.4	1441.2	61.8
32S-8	50.8	31.55	28.58	14.27	237.25	241.85	48	6.4	58.55	1779.2	1921.5	82.263
32S-10	50.8	31.55	28.58	14.27	295.8	300.4	48	6.4	58.55	2224.0	2401.9	102.728