
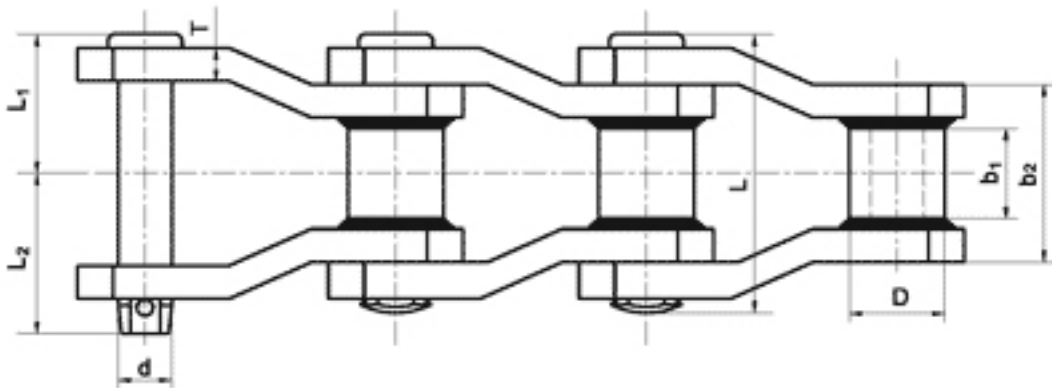
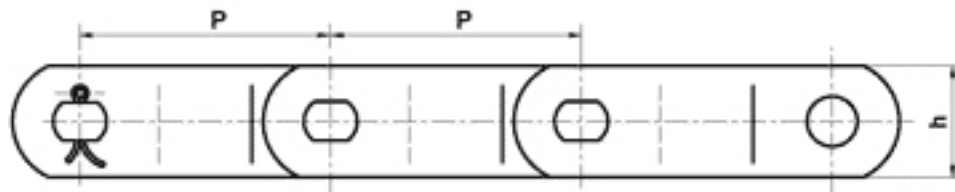


窄系列焊接弯板链

Narrow Series Welded Steel Chains

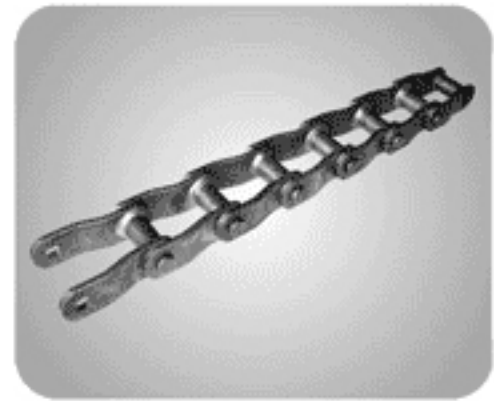

链号 Chain No.	节距 Pitch P mm	窄端 Narrow end		套筒外径 Bush diameter D(max) mm	链板 Sidebar		销轴 Pin				最小抗拉 强度 Ultimate tensile strength Qmin kN	许用工 作载荷 Rated working load kN	每米净重 Weight per meter q kg/m
		b ₁ (min) mm	b ₂ (max) mm		h mm	T mm	d mm	L mm	L ₁ mm	L ₂ mm			
WR78	66.27	28.4	51	22.23	28.6	6.4	12.7	72.3	36.3	39.5	106.8	17.80	5.92
WH78	66.27	28.4	51	22.23	28.6	6.4	12.7	72.3	36.3	39.5	160	26.67	5.92
DWR78	66.27	28.4	50.8	21.4	31.8	6.4	12.7	72.3	36.3	39.5	106.8	17.80	6.39
DWH78	66.27	28.4	50.8	21.4	31.8	6.4	12.7	72.3	36.3	39.5	160	26.67	6.39
WH78-N ₁	66.27	28.8	52.2	22.8	31.8	7	12.7	75	37.5	41	210	35.00	7.02
WS78	66.27	20	41.3	21.3	25.4	6.4	12.7	62.9	31.5	34.6	106	17.67	5.04
AF78	66.27	28.4	50.8	27	31.8	6.4	12.7	72.3	36.3	39.5	106.8	17.80	6.98
*WR78SS	66.27	28.4	51	21.4	31.8	6.4	12.7	72.3	36.3	39.5	80	13.33	6.31
WR82	78.1	31.8	57.4	25.4	31.8	6.4	14.27	79.5	40	43.5	133.4	22.23	6.85
WH82	78.1	31.8	57.4	27	31.8	6.4	14.27	79.5	40	43.5	177.8	29.63	7.14
WH82-N ₁	78.1	31.8	57.1	25.4	31.8	6.4	14.27	79.5	40	43.5	177.8	29.63	6.85

*链条零部件材质为2Cr13 (AISI 420)

The materials for the component parts of the chain with * mark are all 2Cr13(AISI 420)