


# 木材输送链·尖齿链

## Lumber Conveyor Chains · Sharp Top Chains

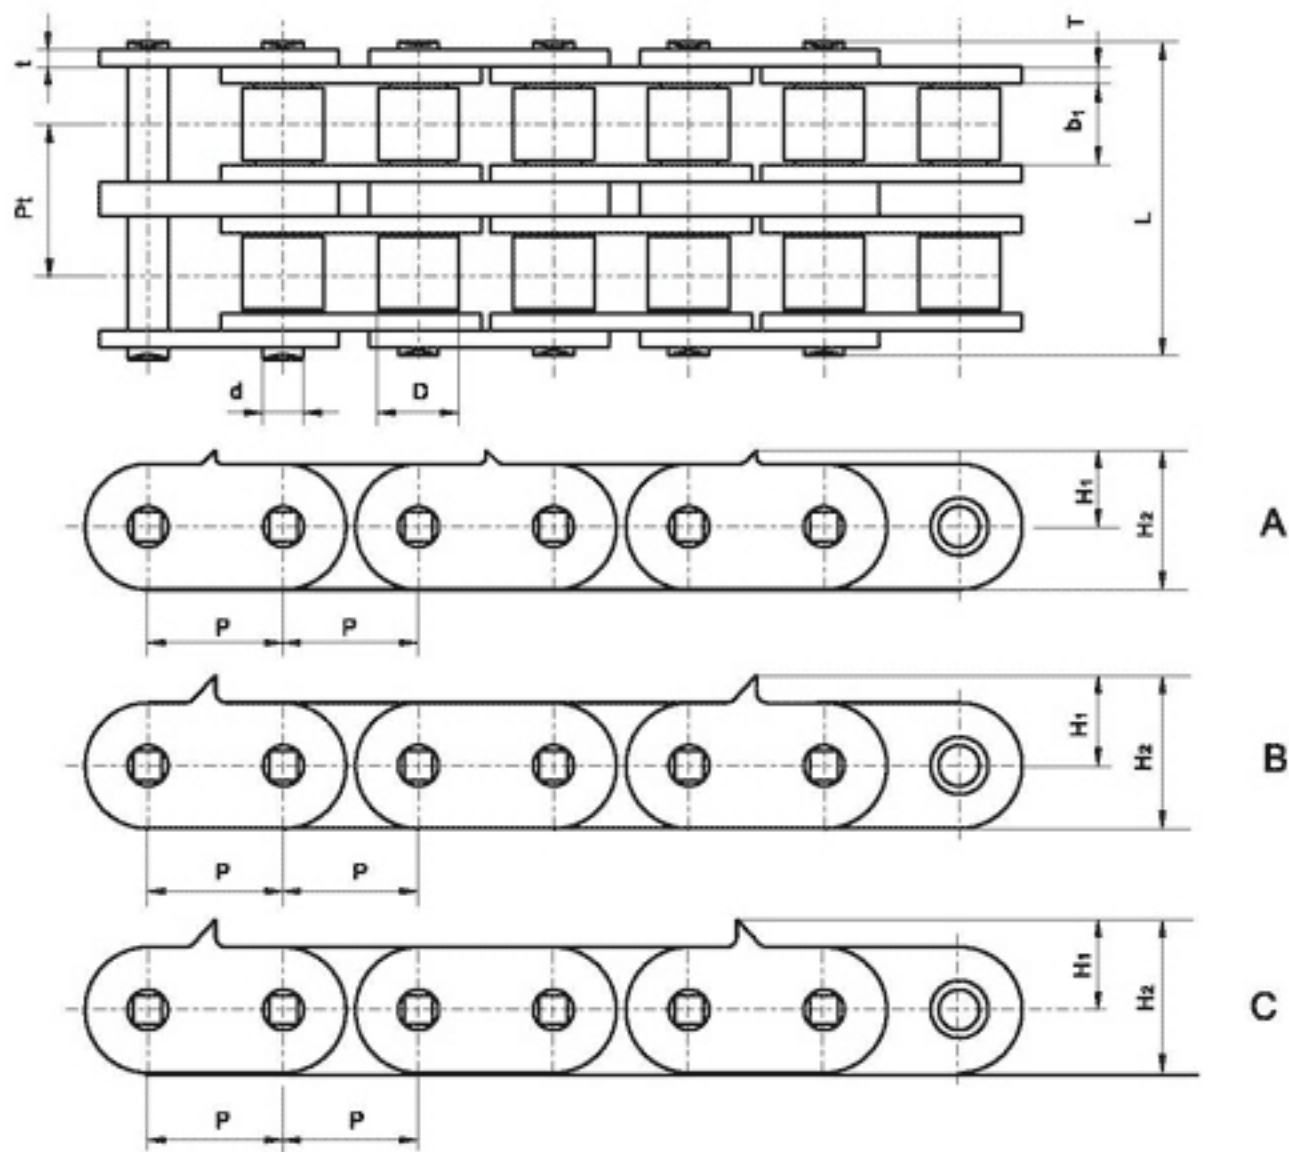

A

B

C

| 链号<br>Chain<br>No. | 节距<br>Pitch<br>P<br>mm | 内节内宽<br>Width<br>between<br>inner plates<br>$b_1$<br>(min)<br>mm | 滚子<br>外径<br>Roller<br>diameter<br>D<br>(max)<br>mm | 销轴<br>Pin |      | 链板<br>Plate    |                |     | 排距<br>Row<br>spacing<br>Pt<br>mm | 最小抗拉<br>强度<br>Ultimate<br>tensile<br>strength<br>Qmin<br>kN | 平均拉<br>伸载荷<br>Average<br>tensile<br>strength<br>Qo<br>kN | 每米净重<br>Weight<br>per<br>meter<br>q<br>kg/m | Type |
|--------------------|------------------------|--|--|-----------|------|----------------|----------------|-----|----------------------------------|---|--|---|------|
|                    |                        |  |  | d         | L    | H <sub>1</sub> | H <sub>2</sub> | t/T |                                  |   |  |   |      |
|                    |                        |  |  | mm        | mm   | mm             | mm             | mm  |                                  |   |  |   |      |
| 100-2-P2PAD        | 31.75                  | 19.05  | 19.05  | 9.52      | 75.4 | 17.91          | 32.68          | 4   | 35.76                            | 173.5   | 224.3  | 9.03  | A    |
| 100-2-PSD          | 31.75                  | 19.05  | 19.05  | 9.52      | 75.4 | 20.68          | 35.43          | 4   | 35.76                            | 173.5   | 224.3  | 9.02  | B    |
| 100-2-P4PAD        | 31.75                  | 19.05  | 19.05  | 9.52      | 75.4 | 20.68          | 35.43          | 4   | 35.76                            | 173.5   | 224.3  | 9.02  | C    |
| 100-2-P4AD-N1      | 31.75                  | 19.05  | 19.05  | 9.52      | 75.4 | 17.91          | 32.68          | 4   | 35.76                            | 173.5   | 224.3  | 9.02  | C    |