
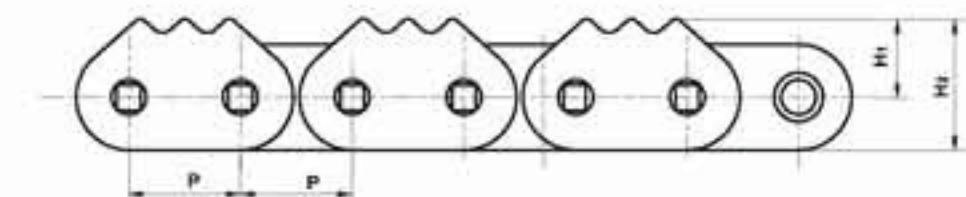
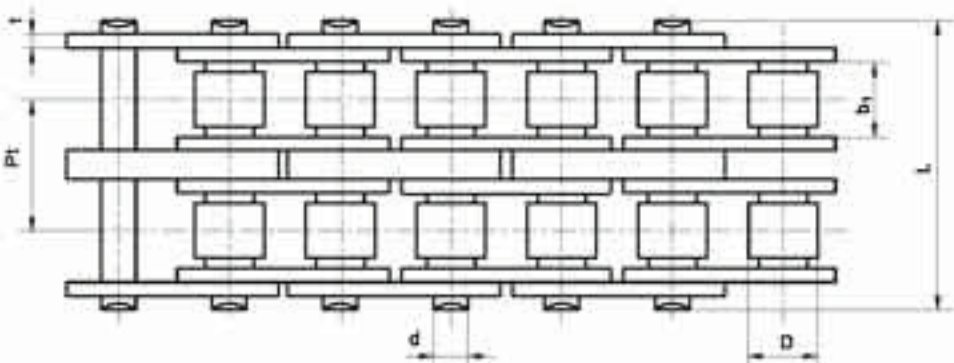
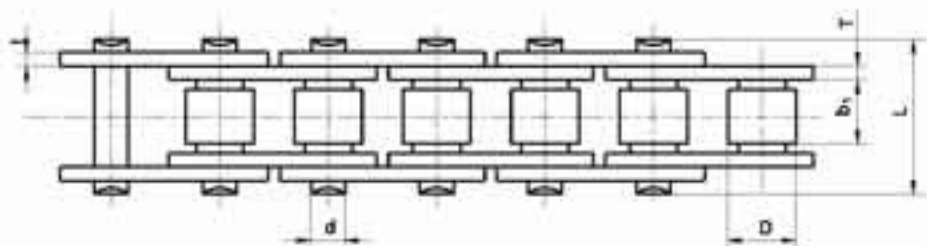


木材输送链·尖齿链

Lumber Conveyor Chains · Sharp Top Chains

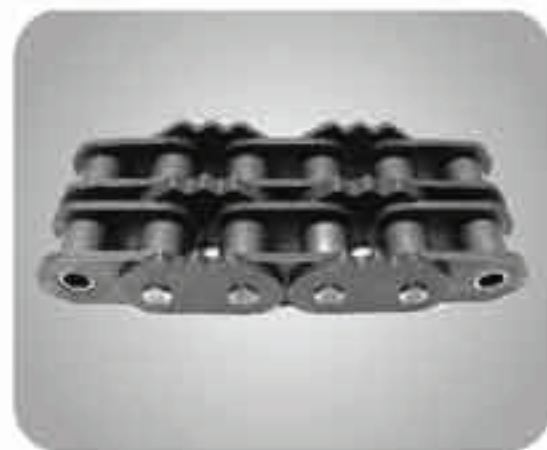

| 链号 Chain No. | 节距 Pitch P mm | 内节内宽 Width between inner plates b ₁ (min) mm | 滚子 外径 Roller diameter D (max) mm | 销轴 Pin | | 链板 Plate | | | 排距 Row spacing Pt mm | 最小抗拉 强度 Ultimate tensile strength Q _{min} kN | 平均拉 伸载荷 Average tensile strength Q ₀ kN | 每米净重 Weight per meter q kg/m |
|--------------------|------------------------|---|--|-----------|---------|----------------------|----------------------|-----------|----------------------------------|---|--|---|
| | | | | d mm | L mm | H ₁ mm | H ₂ mm | V/T mm | | | | |
| 60-1-STD | 19.05 | 12.7 | 11.91 | 5.94 | 25.3 | 13.4 | 22.4 | 2.4 | / | 31.1 | 42 | 1.84 |
| 60-2-STD | 19.05 | 12.7 | 11.91 | 5.94 | 48.1 | 13.4 | 22.4 | 2.4 | 22.78 | 62.3 | 80.6 | 3.64 |
| 80-1-STD | 25.4 | 15.93 | 15.88 | 7.92 | 32.41 | 17.4 | 29.31 | 3.2 | / | 55.6 | 70.2 | 3.2 |
| 80-2-STD | 25.4 | 15.93 | 15.88 | 7.92 | 61.5 | 17.4 | 29.31 | 3.2 | 29.29 | 111.2 | 134.8 | 6.37 |
| 80H-1-STD | 25.4 | 15.93 | 15.88 | 7.92 | 35.51 | 17.4 | 29.41 | 4 | / | 55.6 | 70.2 | 3.73 |
| 80H-2-STD | 25.4 | 15.93 | 15.88 | 7.92 | 64.8 | 17.4 | 29.41 | 4 | 29.29 | 111.2 | 134.8 | 6.85 |
| 80SH-2-STD | 25.4 | 15.93 | 15.88 | 7.92 | 69.6 | 17.4 | 29.41 | 6.4/4 | 29.29 | 111.2 | 134.8 | 7.74 |
| 100-1-STD | 31.75 | 19.05 | 19.05 | 9.52 | 39.6 | 18.9 | 33.65 | 4/4 | / | 86.7 | 115 | 4.65 |
| 100-2-STD | 31.75 | 19.05 | 19.05 | 9.52 | 75.4 | 18.9 | 33.65 | 4/4 | 35.76 | 173.5 | 224.3 | 9.22 |
| 120-1-STD | 38.1 | 25.4 | 22.23 | 11.1 | 50 | 23.09 | 40.49 | 4.9 | / | 124.6 | 170 | 6.85 |