



# 窄系列焊接弯板链

## Narrow Series Welded Steel Chains

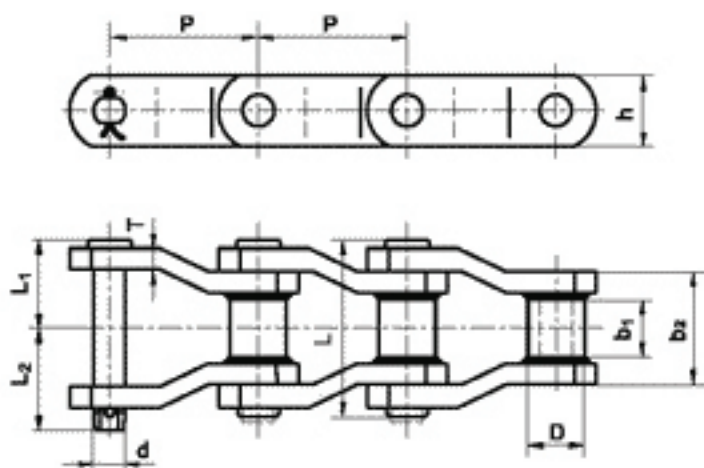

链号	节距	窄端		套筒外径	链板		销轴				最小抗拉强度	许用工作载荷	每米净重
Chain	Pitch	Narrow end		Bush diameter	Sidebar		Pin				Ultimate tensile strength	Rated working load	Weight per meter
No.	P mm	b <sub>1</sub> (min) mm	b <sub>2</sub> (max) mm	D(max) mm	h mm	T mm	d mm	L mm	L <sub>1</sub> mm	L <sub>2</sub> mm	Q <sub>min</sub> kN	kN	q kg/m
WR78XHD	66.95	25.4	51.2	25.4	31.8	9.5	14.27	79.5	40.5	45	133	22.17	9.32
WH78XHD	66.95	25.4	51.2	25.4	31.8	9.5	14.27	79.5	40.5	45	160	26.67	9.32
WR82XHD	78.1	28.6	60.8	31.75	38.1	9.5	19.05	91.8	46.7	50.6	224	37.33	12.7
WH82XHD	78.1	28.6	60.8	31.75	38.1	9.5	19.05	91.8	46.7	50.6	253	42.17	12.7
WR124XHD	103.2	38.1	76.3	41.28	50.8	12.7	25.4	117.4	59.68	64.02	373.4	62.23	21.23
WH124XHD	103.2	38.1	76.3	41.28	50.8	12.7	25.4	117.4	59.68	64.02	542.3	90.38	21.23

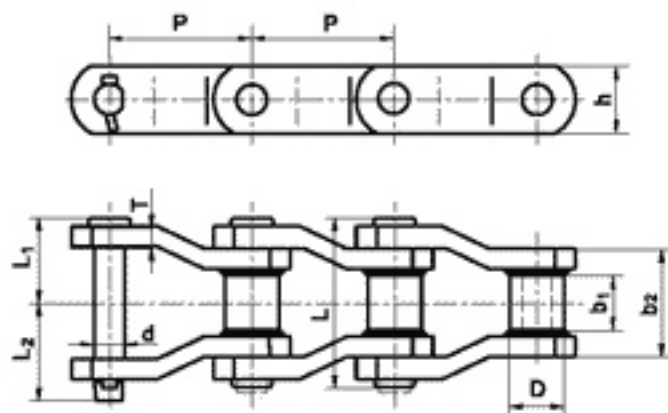

链号	节距	窄端		套筒外径	链板		销轴				最小抗拉强度	许用工作载荷	每米净重
Chain	Pitch	Narrow End		Bush diameter	Sidebar		Pin				Ultimate tensile strength	Rated working load	Weight per meter
No.	P mm	b <sub>1</sub> (min) mm	b <sub>2</sub> (max) mm	D(max) mm	h mm	T mm	d mm	L mm	L <sub>1</sub> mm	L <sub>2</sub> mm	Q <sub>min</sub> kN	kN	q kg/m
WHX124	101.6	41.2	71.11	38.53	38.1	9.5	19	105.6	51.88	56.12	225	37.50	12.45
WHX132	153.67	72.1	111.76	44.45	50.8	12.7	25.2	151.3	77.54	84.16	377.8	62.97	20.42
WHX150	153.67	72.1	111.76	44.45	63.5	12.7	25.2	151.3	77.54	84.16	400	66.67	24.48
WHX155	153.67	69.85	112.01	44.45	63.5	14.3	28.37	154.8	78.03	86.87	453	75.50	27.42
WHX157	153.67	69.85	118.11	44.45	63.5	15.9	28.52	163.3	82.1	91.9	520	86.67	29.03