



木材输送链·尖齿链

Lumber Conveyor Chains · Sharp Top Chains

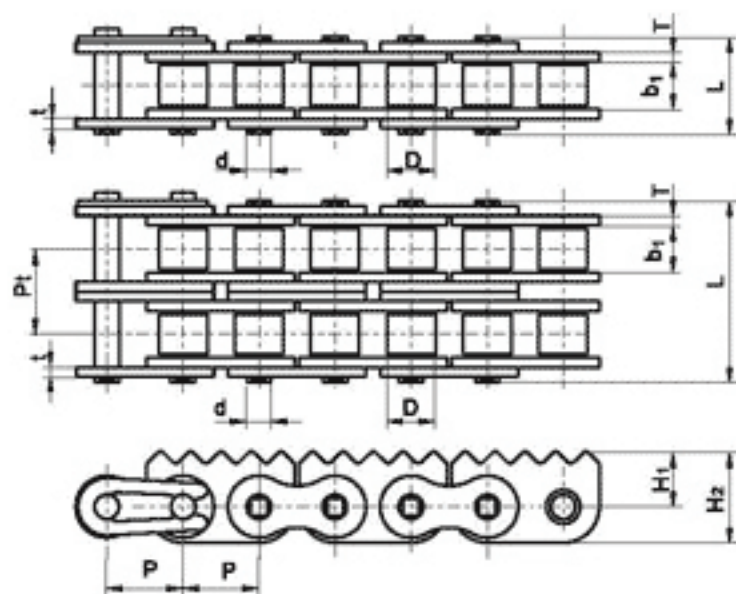

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b ₁ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin		链板 Plate			排距 Row spacing Pt mm	最小抗拉 强度 Ultimate tensile strength Q _{min} kN	平均拉 伸载荷 Average tensile strength Q ₀ kN	每米净重 Weight per meter q kg/m
				d mm	L mm	H ₁ mm	H ₂ mm	l/T mm				
50-1-STD	15.875	9.53	10.16	5.08	20.5	11.6	19	2	/	21.8	31	1.19
50-2-STD	15.875	9.53	10.16	5.08	38.2	11.6	19	2	18.11	43.6	59.5	2.35

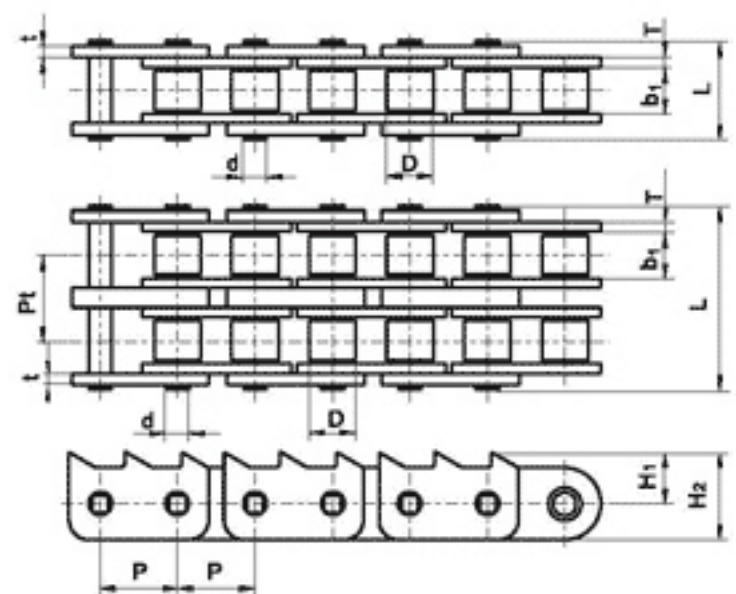

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b ₁ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin		链板 Plate			排距 Row spacing Pt mm	最小抗拉 强度 Ultimate tensile strength Q _{min} kN	平均拉 伸载荷 Average tensile strength Q ₀ kN	每米净重 Weight per meter q kg/m
				d mm	L mm	H ₁ mm	H ₂ mm	t/T mm				
100-1SL-LP	31.75	19.05	19.05	9.52	40.5	21.1	35.85	4.5/4	/	86.7	115	4.91
100-2SL-LP	31.75	19.05	19.05	9.52	78.3	21.1	35.85	4.5/4	35.76	173.5	224.3	9.43