



铺路机链

Paver Chains

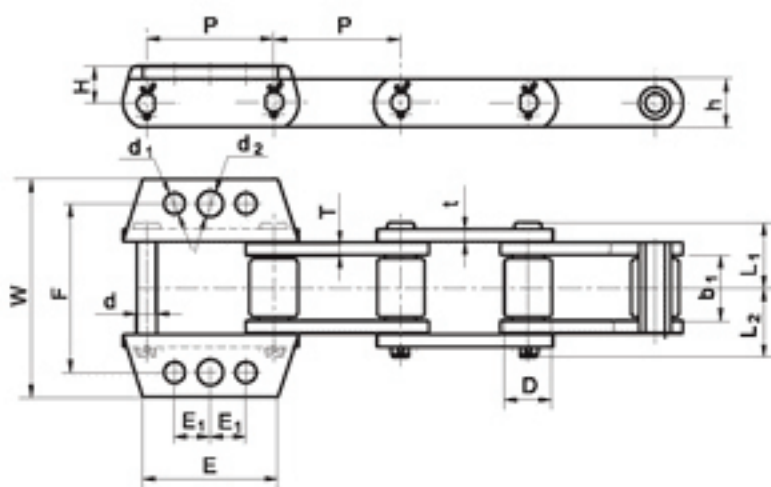

F	W	E ₁	E	d ₁	d ₂	H
mm	mm	mm	mm	mm	mm	mm
134.9	174.6	28.6	108	16.66	20.63	28.6

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between sidebars b ₁ (min) mm	滚子 外径 Roller diameter D(max) mm	销轴 Pin			链板 Sidebar		最小抗拉 强度 Ultimate tensile strength Q _{min} kN	许用工作 载荷 Rated working load kN
				d mm	L ₁ mm	L ₂ mm	h mm	t/T mm		
HS 3433-K33	101.6	52.83	38.1	15.74	52.3	56.7	38.1	9.5	190	17.1

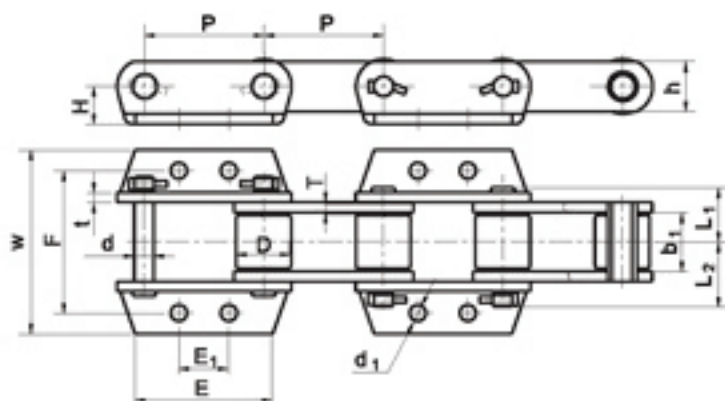

链号 Chain No.	F mm	W mm	E ₁ mm	E mm	d ₁ mm	H mm
B9856-K44	184.15	237.2	63.5	175.5	20.63	47.63
RMC15128	184.2	244.5	63.5	178.5	20.6	47.65

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between sidebars b ₁ (min) mm	滚子 外径 Roller diameter D(max) mm	销轴 Pin			链板 Sidebar		最小抗拉 强度 Ultimate tensile strength Q _{min} kN	许用工作 载荷 Rated working load kN
				d mm	L ₁ mm	L ₂ mm	h mm	t/T mm		
B9856-K44	152.4	74.93	69.85	25.3	72.2	82.7	63.5	12.7	500	55
RMC15128	152.4	76.2	69.85	25.4	71.3	77.7	63.5	12.7	622.3	88.9